Print on Plain White Paper (Part No. 122919)

MIDMARK

Installation Instructions

9A88002 Restraint Straps

KIT COMPONENTS

Part Number	Description	Qty.
9A88002	Restraint Straps Package	1
003-0367-00	Installation Instructions	1

REQUIRED TOOLS

Phillips Head Screwdriver
Power Hand Drill
1/4” Drill Bit
Measuring Tape

IMPORTANT INSTRUCTIONS

Provides a means to confine a patient to table during an examination or general procedure.

EQUIPMENT ALERT

Unplug table power cord when working on table.

INSTALLATION (1)

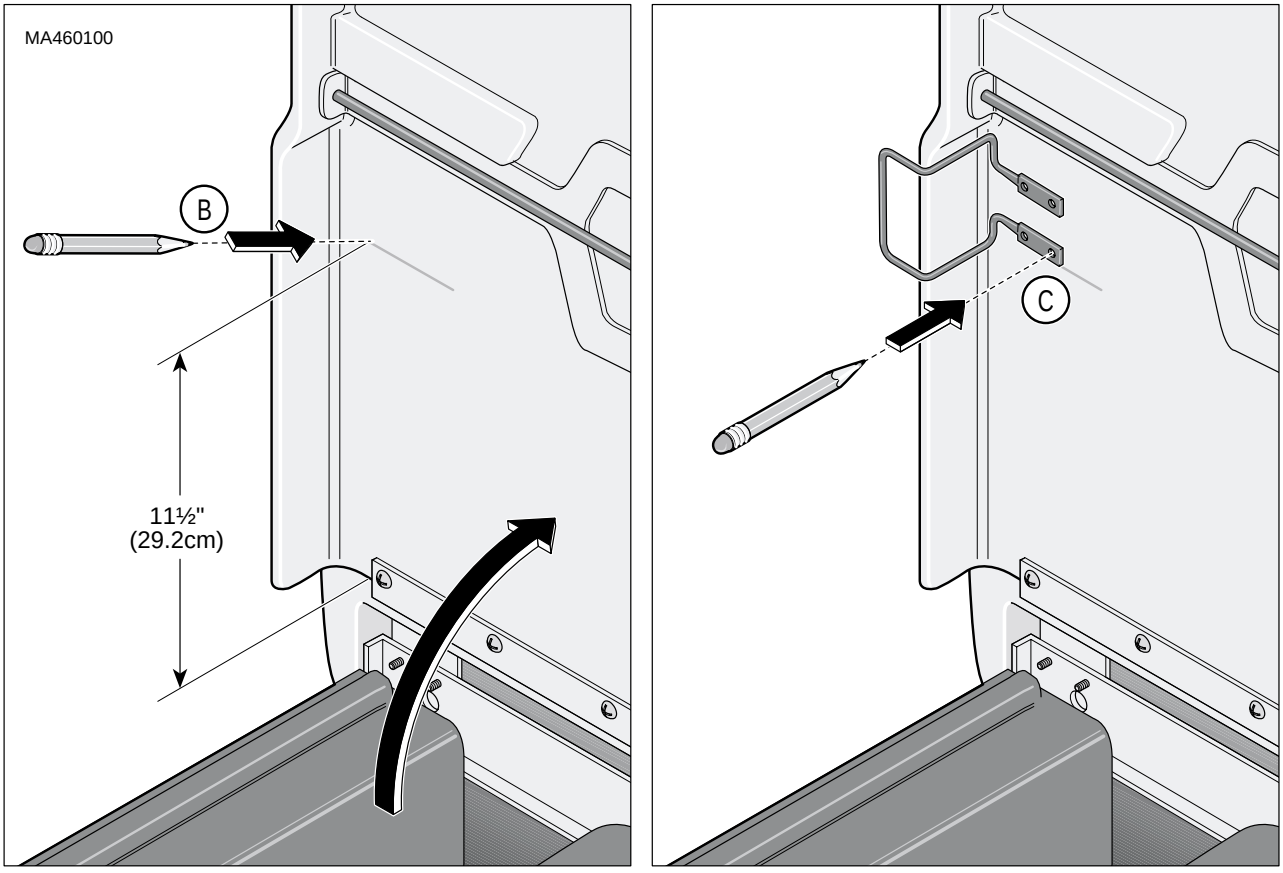

A. After removing upholstery, raise table back section to highest position.

NOTE

Use same procedure when installing both restraint brackets for back section.

B. Working from side opposite the upholstery side, measure from bottom of back section up 11 1/2” (29.2 cm) and place a mark.

C. Place bottom of restraint bracket at location mark and flush with side of back section and mark location of four mounting holes.

© Midmark Corporation - 1998

INSTALLATION (2)

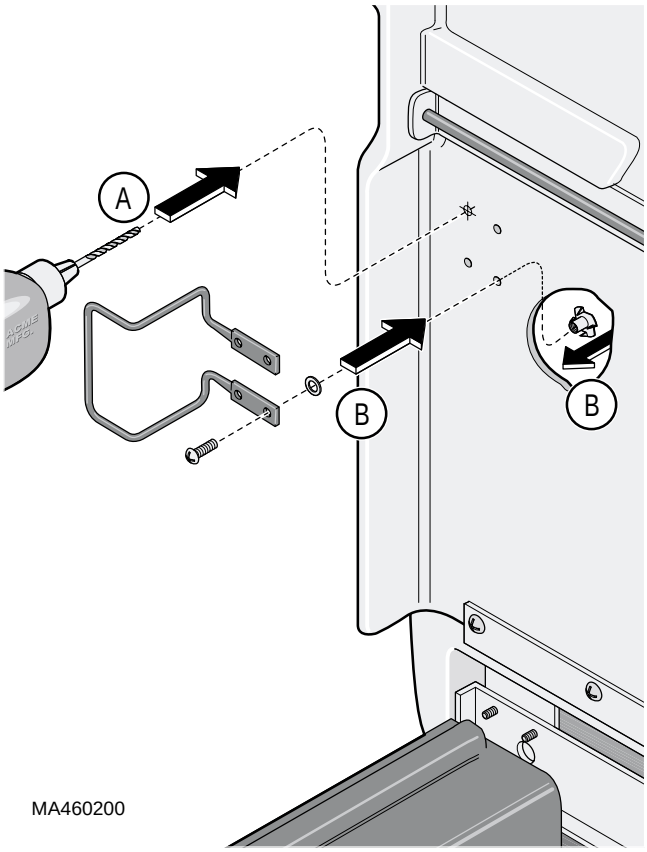

MA460200

A. After removing restraint bracket, drill mounting holes through back section using a 1/4" drill bit.

EQUIPMENT ALERT

Use care when installing T-nuts to prevent bending tabs on nuts or damaging table back section. Do not use hammer to install nuts.

NOTE

The washers must be positioned between the restraint bracket and the back section. Push down on T-nuts when installing mounting bolts. Tighten mounting bolts until tabs on T-nuts are fully imbedded in back board section.

B. Install restraint brackets, bolts, washers and T-nuts.

INSTALLATION (3)

MA460300

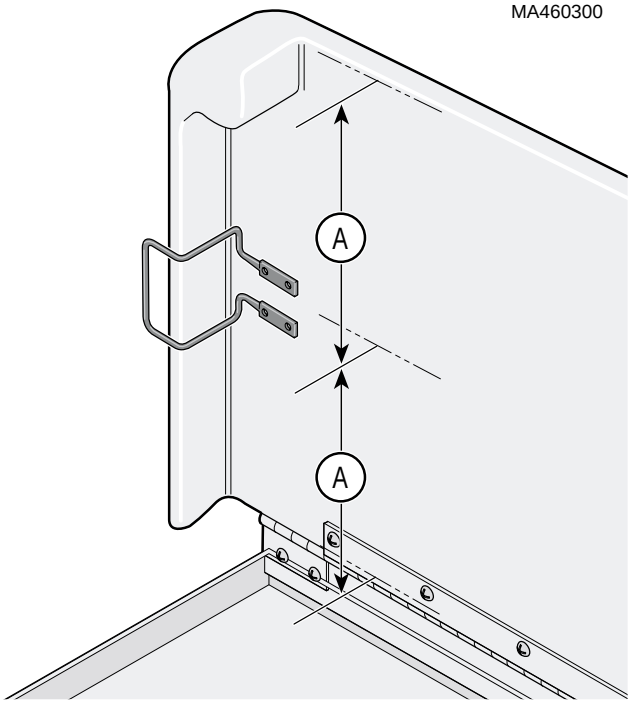

NOTE

Install the seat restraint brackets in the same manner as the back restraint brackets but the brackets must be centered on the seat section.

A. Center the restaint brackets on the back of the seat section and install in the same manner as the back restraint brackets.

INSTALLATION (4)

MA460400

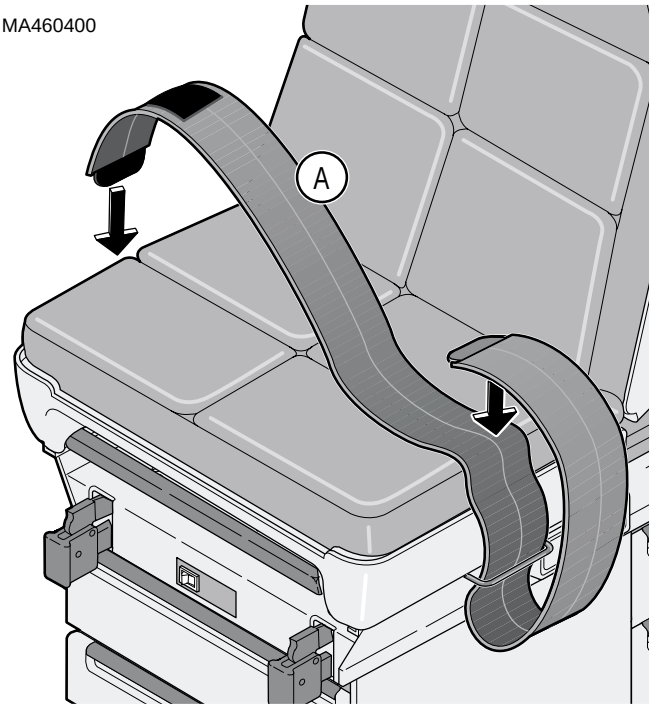

A. Install one restraint belt per set of brackets. Loop ends through brackets as shown above.

MIDMARK®

Midmark Corporation, Versailles, Ohio 45380 U.S.A.
(937) 526-3662 FAX (937) 526-5542

003-0367-00 Rev. C (7/98)

© Midmark Corporation - 1998